


VIBRATING SCREED TORNADO


201214_TO_MKII_ES_V7




The Tornado vibrating screed is an exceptional option when choosing to vibrate concrete. Enar guarantees an optimum level of concrete compaction regardless of the type of concrete being

DESIGNED & MANUFACTURED IN EUROPE FOR QUALITY AND EFFICIENCY

Robust, easy to use and ergonomic are words more frequently used when describing the Tornado from Enar. The rubber handles conform to many regulations and also provide a reduced level of vibrations to the user. The range includes either petrol or electric motors.

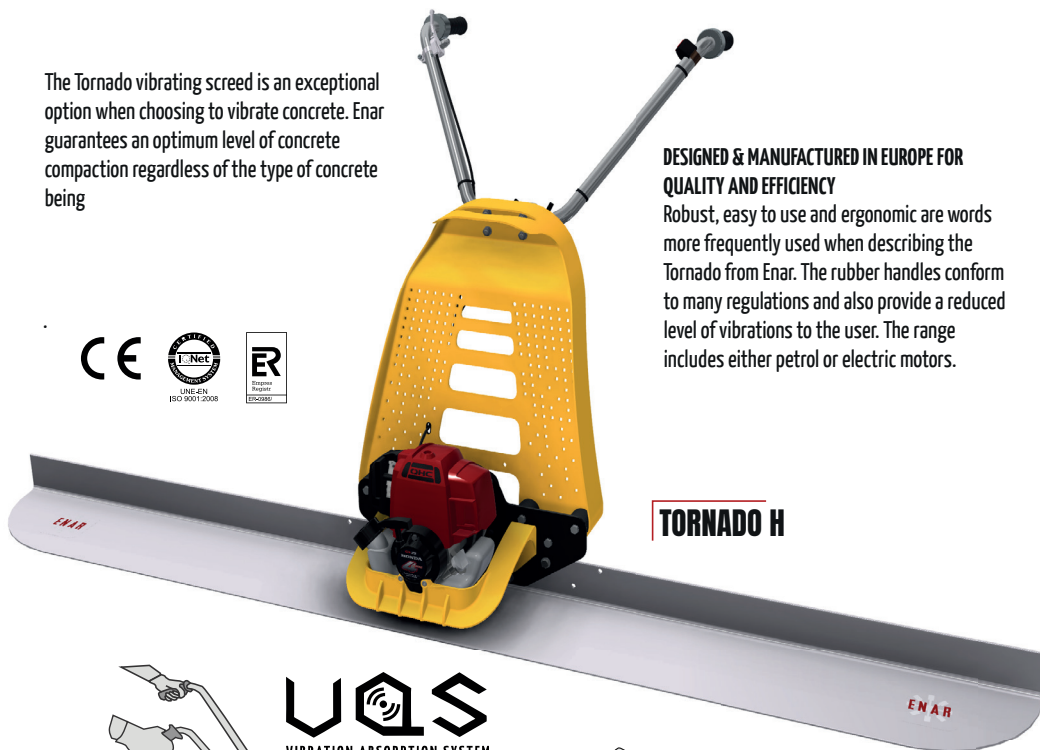

TORNADO H




+ Comfortable to Manage Reliably simple.

The Enar Tornado has handles that are designed to reduce the vibrations to the users hands making it more comfortable when being used.



+ Light And easy to use.

This product is easily used by one person on a job site thanks to its size and weight. This also allows for better transportation of the product.




+ Complete Range Variety of models.

The range provided by Enar in the Tornado range means it is easier to facilitate the user's needs. This is achieved through its range of profile lengths and differing motors.



+ Ergonomic Adapted to user.

Adapted to each user. The handle of the TORNADO is easily adjustable in height and features self-damping.



TECHNICAL DATA

PETROL SCREEDS

MODEL	ENGINE	POWER (CV)	FUEL	FUEL TANK (L)	FREQUENCY (vib/min)	CENTRIFUGAL FORCE (N)	WEIGHT (Kg)
TORNADO H	HONDA GX25 4t/st	1,1	Gasoline	0,5	Until 9.000	1.500	12,2

ELECTRIC SCREEDS

MODEL	ENGINE	POWER (W)	FREQUENCY (vib/min)	CENTRIFUGAL FORCE (N)	WEIGHT (Kg)
TORNADO E	External Vibrator 230V 1~	135	2.850	700	9,5
TORNADO E TURBO 230V	Electric 230V 1~	500	12.000	1.300	12,2
TORNADO E-BATT	Electric 24V	130	5.500	1.400	12

OPTIONS

- Extra Battery for Tornado E-BATT
- VAS anti-vibration grips

PROFILES

LENGTH (m)	WEIGHT (Kg)
1,5	4,6
2	6,2
2,5	7,8
3	9,3
4	12,5



- › High resistance, aluminium profiles.
- › Rounded ends to the profiles.
- › Strict flatness control while in use.
- › Profile base of 200mm/20cm to obtain a greater control and glide.
- › Profiles available from 1.5m to 4m.



TORNADO E



TORNADO E TURBO