

GASOLINE & ELECTRIC POWER TROWEL

CPT36E / CPT48E / CPT36M / CPT48M

CPT-SERIES are convenient with high performance to use it at the job sites to make a big parking lots and large flat for commercial and industrial areas. You can complete a finishing job easily and economically in shorter period with less man power.




Features

- Over built gearbox assures long service life
- Heavy-weight design to assure a superior finish
- Height adjustable handle, assures operator comfort and easy control
- Lifting tube as standard features allows trowel to be transported on the job-site with only two man power
- Centric-safety switch shuts the engine down in the event of the operator loosing control handle of the trowels
- Screw control ensures precise blade adjustment
- Lifting hook for easy transportation
- Foldable handle for easy transportation and storage
- Low maintenance cost and long life span
- Dependable gear & gear box design provides maximum torque transfer
- Responsive clutch and pulley system for smooth speed transitions
- Four blade design with maximum rotor speed of 50~100RPM

Use

Finishing work for wide concrete floor & road in job site of any size

Product Views

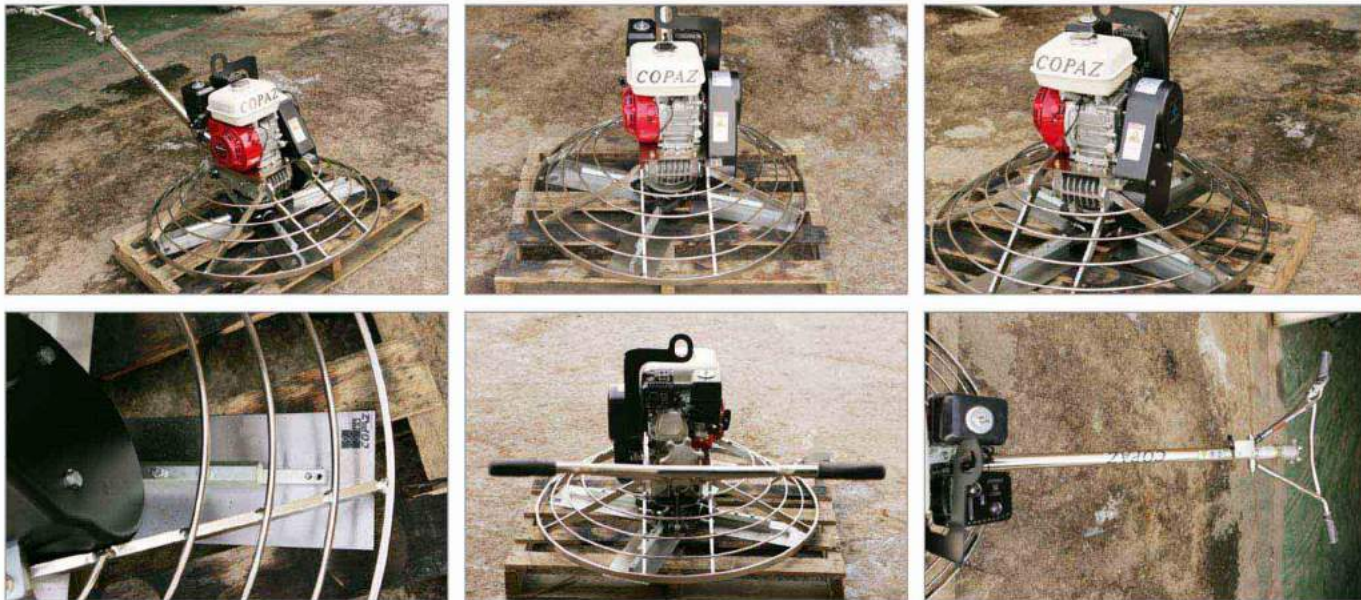

Safety device for worker



GASOLINE & ELECTRIC TYPE POWER TROWEL

CPT36E / CPT48E / CPT36M / CPT48M



CPT36E



CPT4 E

Electric power trowel (CPT-36M / CPT-48M)



Option

Blade & Circular Pan



Blade



Circular Pan

Option

Engine (HONDA, ROBIN)



GX160 (5.5HP)



EX17 (6.0HP)

Specifications

MODEL		CPT-36E	CPT-48E	CPT-36M	CPT-48M
WEIGHT	kg / lb	78 / 171	94 / 207	81 / 171	92 / 207
DIMENSION (W) x (L) x (H)	mm / inch	945 x 1943 x 937 37.2 x 76.5 x 36.8	1170 x 2055 x 967 46.0 x 80.9 x 38.0	945 x 1943 x 937 37.2 x 76.5 x 36.8	1170 x 2055 x 967 46.0 x 80.9 x 38.0
LENGTH OF HANDLE	mm / inch	1504 / 59.2	1504 / 59.2	1504 / 59.2	1504 / 59.2
WORKING AREA	mm / inch	945 / 37	1170 / 46	945 / 37	1170 / 46
BLADE SPEED	RPM	50 ~ 150	50 ~ 150	50 ~ 100	50 ~ 100
ENGINE					
BRAND		HONDA	ROBIN	HONDA	SIEMENS
MODEL		GX160	EX17	GX390	SIEMENS
TYPE		AIR-COOLED 4-CYCLE		INVERTER WITH ELECTRIC MOTOR	
FUEL		GASOLINE		ELECTRICITY	
OUTPUT	hp / kw	5.5 / 4.12	6.0 / 4.5	13.0 / 9.75	3.0 / 2.25
SPEED	RPM	3600		1750	
TANK CAPACITY	l / gal	3.6 / 0.95	3.6 / 0.95	6.0 / 1.6	220V 50 / 60hz
WEIGHT	kg / lb	15 / 33	15 / 33	31 / 68.2	380V 50 / 60hz
					18 / 39.6
					29 / 63.9